


Features

- Low forward voltage
- Low reverse current
- Small package

HF



SOD-523

Mechanical Data

- Case: SOD-523
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
1SS388	SOD-523	3000pcs / Tape & Reel	S3

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V _{RRM}	45	V
DC Reverse Voltage	V _R	40	V
Maximum(peak) Forward Current	I _{FM}	300	mA
Continuous Forward Current	I _F	100	mA
Peak Forward Surge Current (10ms single half sine-wave)	I _{FSM}	1	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P _D	150	mW
Thermal Resistance Junction-to-Air *1	R _{θJA}	667	°C/W
Thermal Resistance Junction-to-Lead *1	R _{θJL}	663	°C/W
Thermal Resistance Junction-to-Case *1	R _{θJC}	415	°C/W
Operating Junction Temperature	T _J	125	°C
Storage Temperature Range	T _{STG}	-40 ~ +150	°C

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F^{*2}	$I_F = 1\text{mA}$	-	0.28	-	V
		$I_F = 10\text{mA}$	-	0.36	-	V
		$I_F = 50\text{mA}$	-	0.40	0.60	V
Maximum Peak Reverse Current	I_R^{*3}	$V_R = 10\text{V}$	-	-	5	μA
Capacitance Between Terminals	C_J	$V_R=0\text{V}, f=1\text{MHz}$	-	22	25	pF

Notes:

- Part mounted on FR-4 board with recommended pad layout
- Pulse width $\leq 380\ \mu\text{s}$, Duty cycle $< 2\%$
- pulse test, $t_p \leq 5\text{ms}$

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

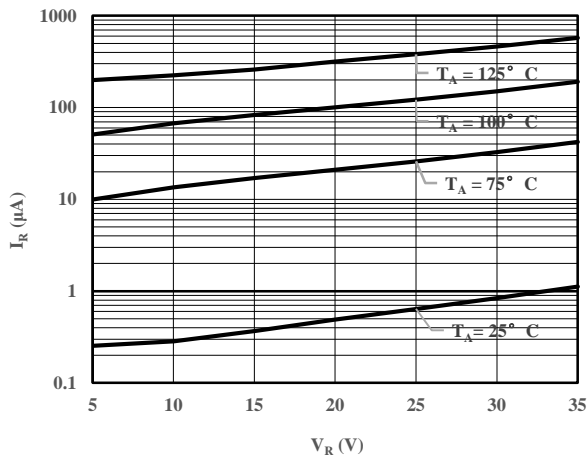


Fig 1 Typical Reverse Characteristic

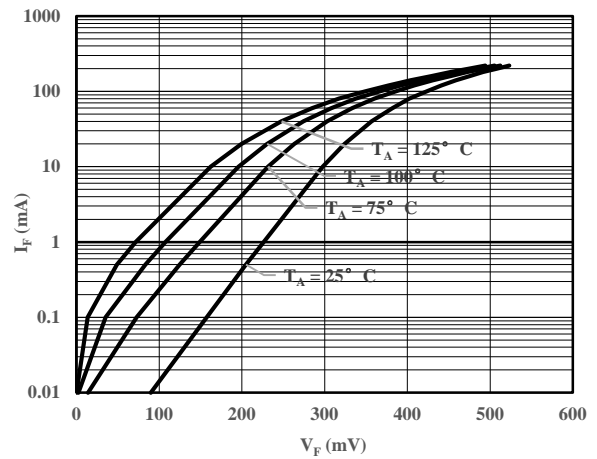


Fig 2 Typical Forward Characteristics

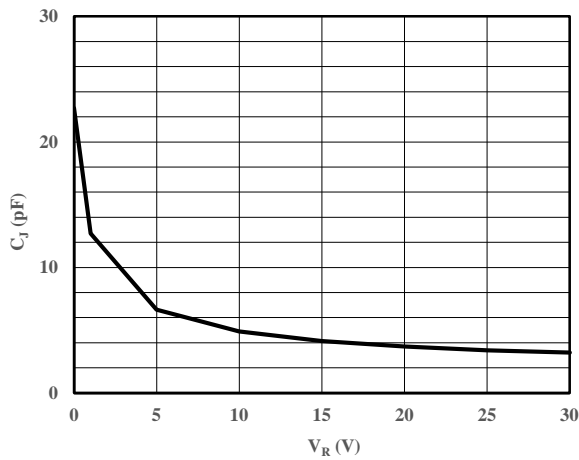


Fig 3 Capacitance Characteristics



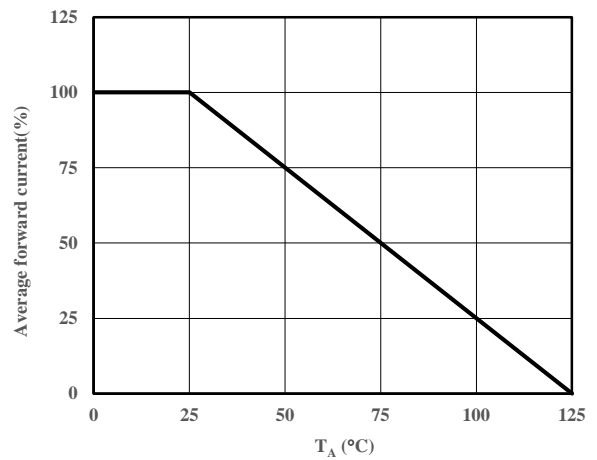


Fig 4 Derating Curve

Package Outline Dimensions (Unit: mm)

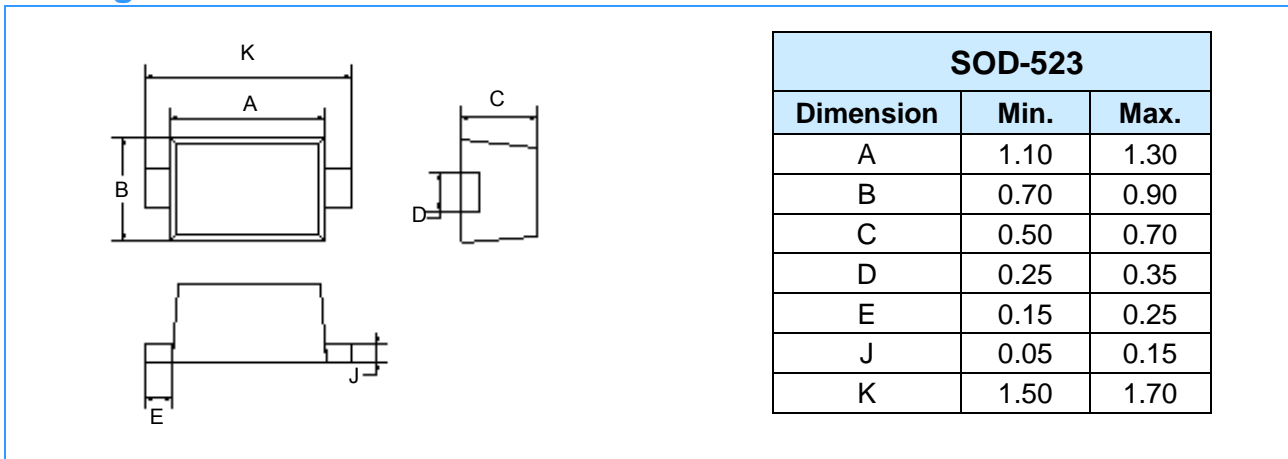

Package Outline Dimensions (Unit: mm)

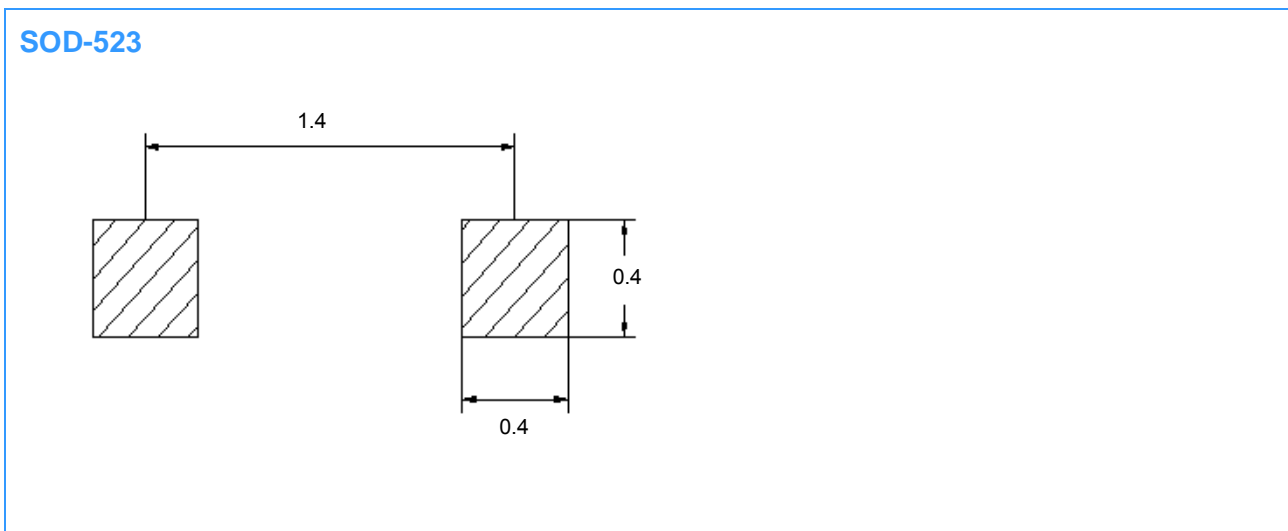

Important Notice

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.