



Features

- Low Forward Voltage.
- Low Capacitance.



Typical Applications

- UHF Mixer.
- Sampling Circuits.
- Modulators.
- Phase Detection.



BAT17
SOT-23

Mechanical Data

- Case: SOT-23
- Terminals: solderable per MIL-STD-202, Method 208.

Ordering Information

Part Number	Package	Shipping	Marking Code
BAT17□	SOT-23	3000/Tape&Reel	17

□: none is for Lead Free package;

“G” is for Halogen Free package.

Maximum Ratings (@T_A=25°C unless otherwise specified)

Parameter	Symbol	Limits	Unit
DC Reverse Voltage	V _R	4	V
Forward Continuous Current	I _F	30	mA

Thermal Characteristics




Parameter	Symbol	Limits	Unit
Thermal Resistance, Junction to Ambient Air ^(Note1)	R _{θJA}	500	°C/W
Operating Junction Temperature Range	T _j	-55 to +100	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C

Electrical Characteristics (@T_A=25°C unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward Voltage	V _F	I _F =0.1mA	-	-	0.35	V
		I _F =1mA	-	-	0.45	V
		I _F =10mA	-	-	0.6	V
Reverse Leakage Current	I _R	V _R =3V	-	-	250	nA
		V _R =3V, T _A =60°C	-	-	1.25	uA
Capacitance Between Terminals	C _T	V _R =0V, f=1MHz	-	-	3	pF


Note1: Refer to SOT23 standard mounting conditions.

Ratings and Characteristic Curves ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

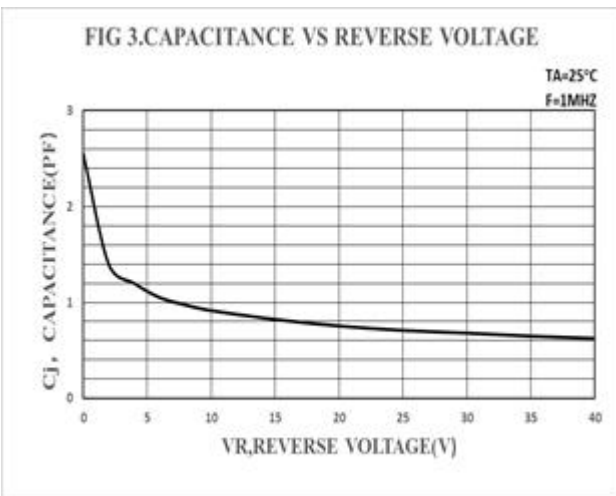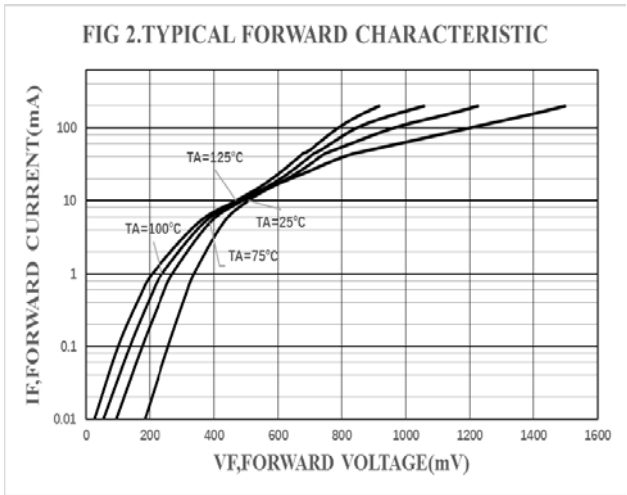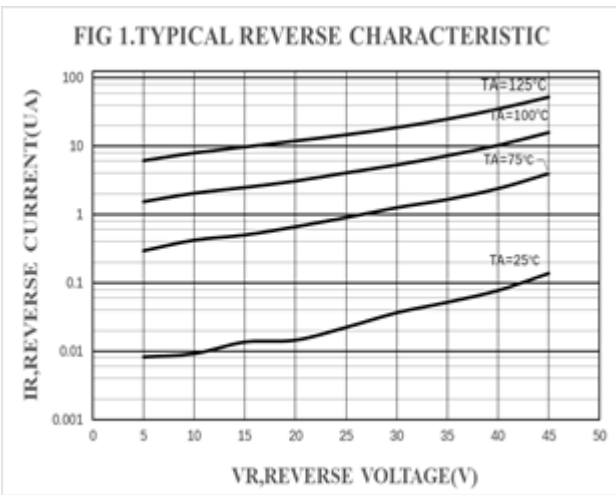

Package Outline Dimensions(unit:mm)


SOT-23

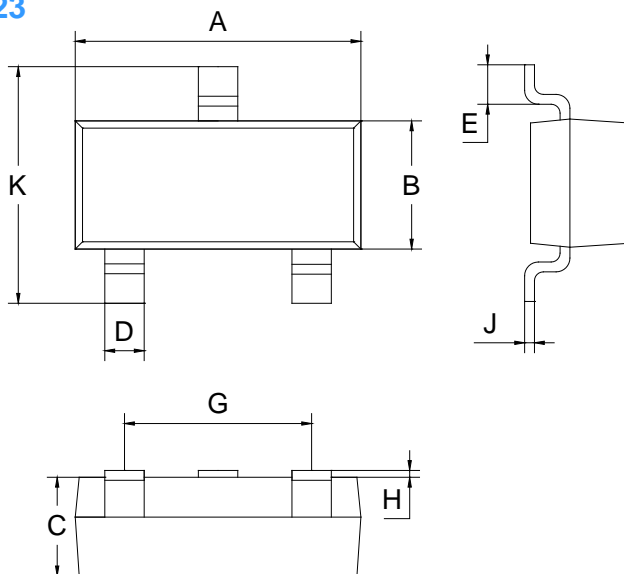

SOT-23		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	0.90	1.10
D	0.30	0.50
E	0.35	0.48
G	1.80	2.00
H	0.02	0.10
J	0.05	0.15
K	2.20	2.60

Mounting Pad Layout(unit:mm)

SOT-23

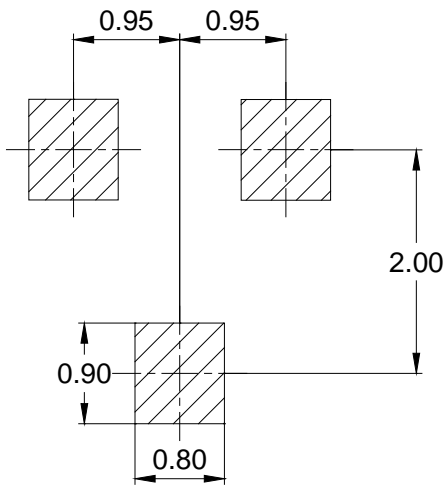

IMPORTANT NOTICE

Galaxy Microelectronics (GME) reserves the right to make changes without further notice to any product herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.