


### Features

- For general purpose applications
- This diodes features very low turn-on voltage and fast switching

**HF**

### Mechanical Data

- Case: SOD-323
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208



SOD-323

### Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
BAT46WS	SOD-323	3000pcs / Tape & Reel	L6

### Maximum Ratings

(@ T<sub>A</sub> = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>	100	V
Repetitive Peak Forward Current	I <sub>FRM</sub>	350	mA
Continuous Forward Current	I <sub>F</sub>	150	mA
Peak Forward Surge Current (8.3ms single half sine-wave)	I <sub>FSM</sub>	0.75	A

### Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P <sub>D</sub>	200	mW
Thermal Resistance Junction-to-Air	R <sub>θJA</sub>	500	°C/W
Operating Junction Temperature Range	T <sub>J</sub>	-55 ~ +125	°C
Storage Temperature Range	T <sub>STG</sub>	-55 ~ +125	°C

**Electrical Characteristics** (@  $T_A = 25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	$V_{(BR)R}$	$I_R = 100\mu\text{A}$	100	-	-	V
Forward Voltage	$V_F$	$I_F = 0.1\text{mA}$	-	-	0.25	V
		$I_F = 10\text{mA}$	-	-	0.45	V
		$I_F = 250\text{mA}$	-	-	1.00	V
Maximum Peak Reverse Current	$I_R$	$V_R = 1.5\text{V}$	-	-	0.5	$\mu\text{A}$
		$V_R = 1.5\text{V}, T_J = 60^\circ\text{C}$	-	-	5	$\mu\text{A}$
		$V_R = 10\text{V}$	-	-	0.8	$\mu\text{A}$
		$V_R = 10\text{V}, T_J = 60^\circ\text{C}$	-	-	7.5	$\mu\text{A}$
		$V_R = 50\text{V}$	-	-	2	$\mu\text{A}$
		$V_R = 50\text{V}, T_J = 60^\circ\text{C}$	-	-	15	$\mu\text{A}$
		$V_R = 75\text{V}$	-	-	5	$\mu\text{A}$
		$V_R = 75\text{V}, T_J = 60^\circ\text{C}$	-	-	20	$\mu\text{A}$
Capacitance Between Terminals	$C_J$	$V_R = 0\text{V}, f = 1\text{MHz}$	-	-	10	pF
		$V_R = 1\text{V}, f = 1\text{MHz}$	-	-	6	pF

**Ratings and Characteristic Curves** (@  $T_A = 25^\circ\text{C}$  unless otherwise specified)

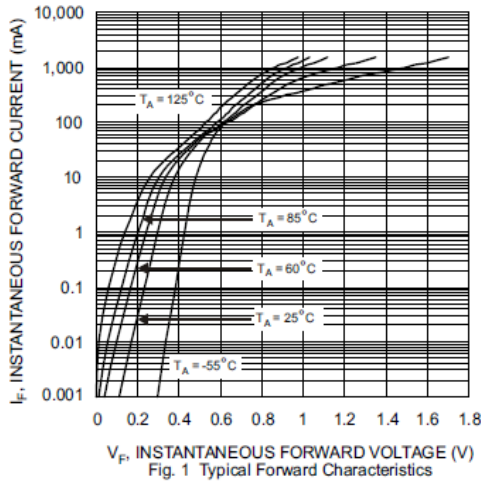


Fig 1 Typical Reverse Characteristic

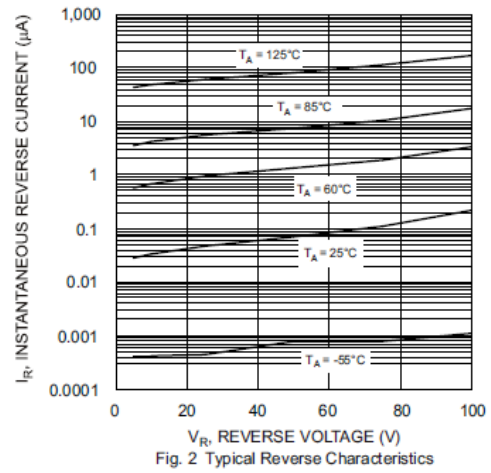


Fig 2 Typical Forward Characteristics

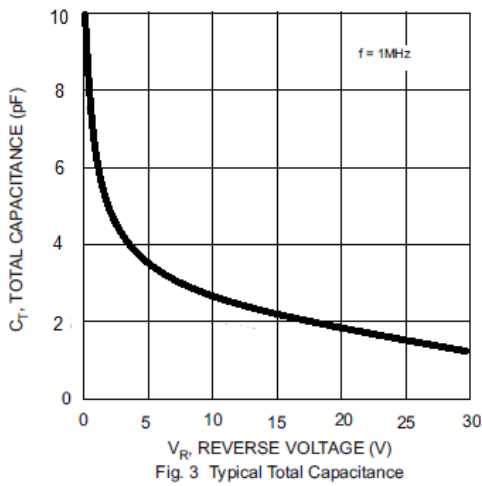


Fig 3 Capacitance Characteristics



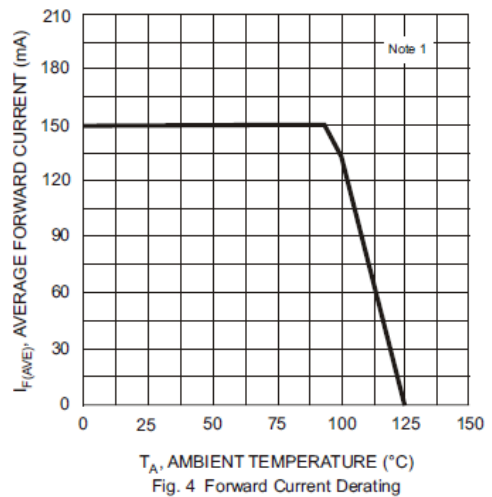


Fig 4 Derating Curve

Package Outline Dimensions (Unit: mm)

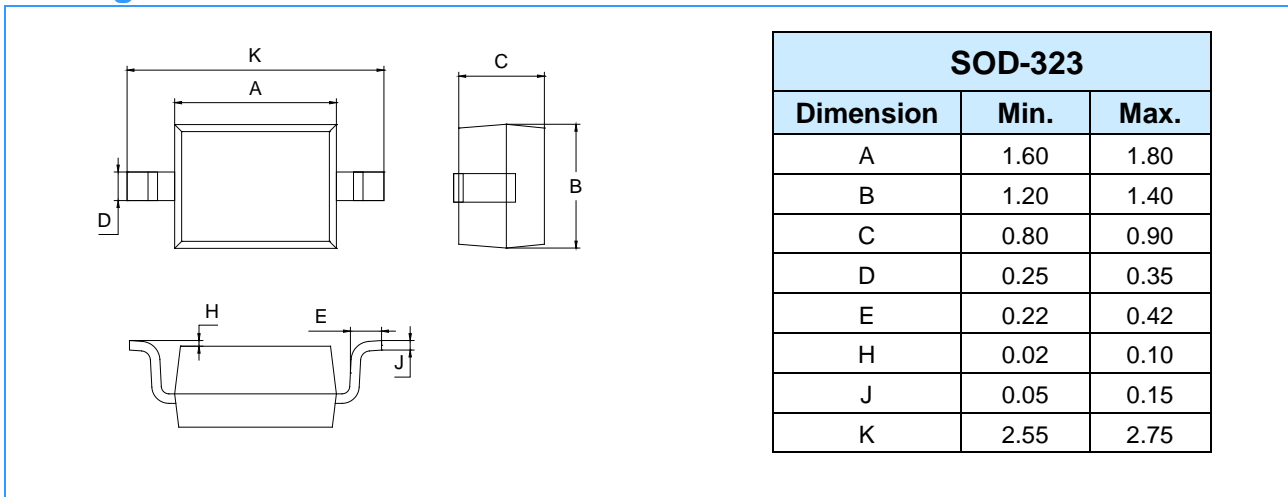

Package Outline Dimensions (Unit: mm)

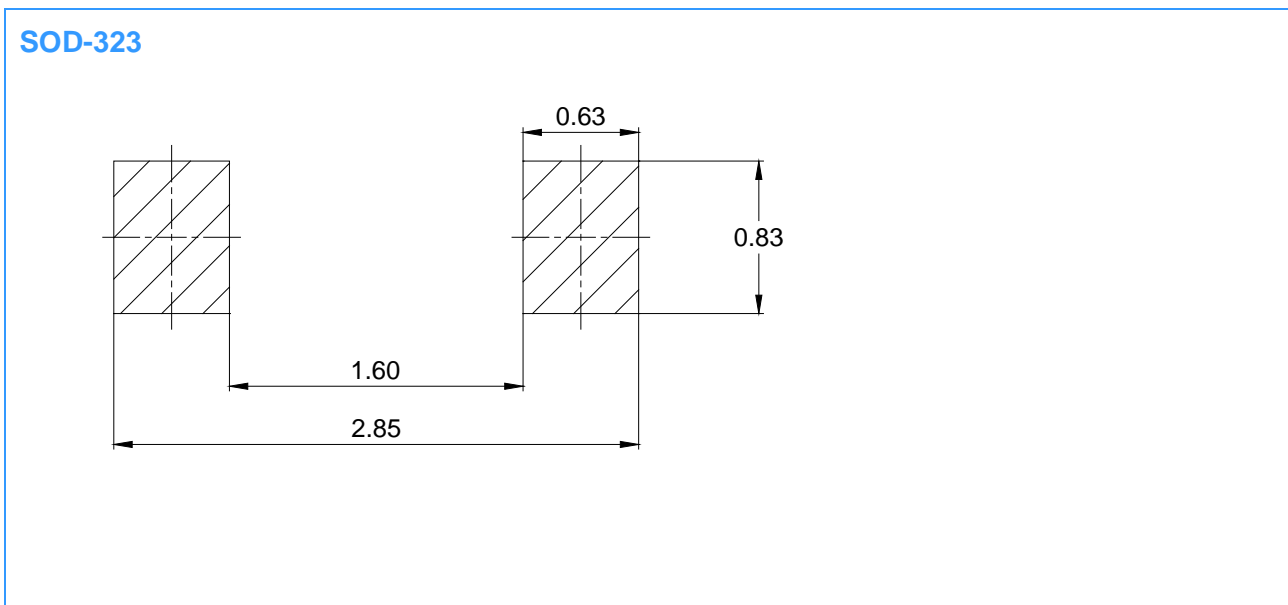

Important Notice

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.