


Features

- Fast switching
- Low turn-on voltage
- PN junction guard ring for transient and ESD protection
- Available in lead free version.
- MSL 1


HF

Mechanical Data


- Case: SOT-23
- Terminals: solderable per MIL-STD-202, Method 208




BAT54




BAT54A



BAT54C



BAT54S



SOT-23

Ordering Information

Part Number	Package	Shipping	Marking Code
BAT54	SOT-23	3000 pcs / Tape & Reel	KL1
BAT54A	SOT-23	3000 pcs / Tape & Reel	KL2
BA T54C	SOT-23	3000 pcs / Tape & Reel	KL3
BAT54S	SOT-23	3000 pcs / Tape & Reel	KL4

Maximum Ratings (@T_A=25°C unless otherwise specified)

Parameter	Symbol	Limits	Unit
Peak Repetitive Peak reverse voltage	V _{RRM}	30	V
Working Peak Reverse Voltage	V _{RWM}		
DC Reverse Voltage	V _R		
Forward Continuous Current	I _F	200	mA
Repetitive Peak Forward Current	I _{FRM}	300	mA
Forward surge current@tp<1s	I _{FSM}	600	mA

Thermal Characteristics

Parameter	Symbol	Limits	Unit
Power Dissipation *	P_D	250	mW
Thermal resistance junction to ambient air	$R_{\theta JA}$	500	$^{\circ}\text{C}/\text{W}$
Thermal resistance junction to case	$R_{\theta JC}$	360	$^{\circ}\text{C}/\text{W}$
Junction temperature	T_J	-55 to +125	$^{\circ}\text{C}$
Storage temperature range	T_{STG}	-55 to +150	$^{\circ}\text{C}$

Electrical Characteristics (@ $T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse Breakdown Voltage	$V_{(BR)}$	$I_R=100\mu\text{A}$	30	-	-	V
Forward voltage *1	V_F	$I_F=0.1\text{mA}$	-	-	0.24	V
		$I_F=1\text{mA}$	-	-	0.32	V
		$I_F=10\text{mA}$	-	-	0.40	V
		$I_F=30\text{mA}$	-	-	0.50	V
		$I_F=100\text{mA}$	-	-	0.8	V
Reverse current *2	I_R	$V_R=25\text{V}$	-	-	2	μA
Capacitance Between Terminals	C_T	$V_R=1\text{V}, f=1\text{MHz}$	-	-	10	pF
Reverse Recovery Time	t_{rr}	$I_F=I_R=10\text{mA}$ $I_{rr}=0.1 \times I_R, R_L=100\Omega$	-	-	5	ns
*1: pulse test, $t_p \leq 300\mu\text{s}$						
*2: pulse test, $t_p \leq 5\text{ms}$						

Ratings and Characteristic Curves (@ $T_A=25^{\circ}\text{C}$ unless otherwise specified)

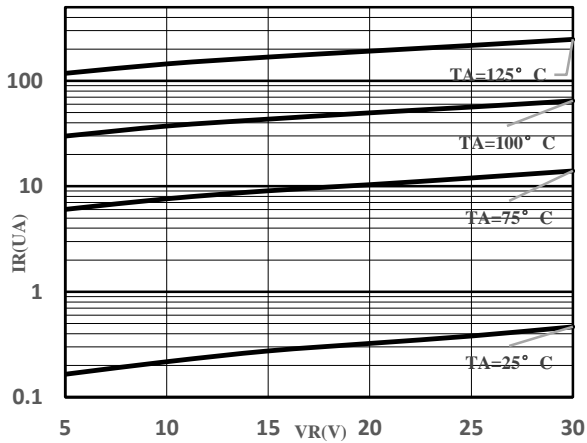


Fig 1 Typical Reverse Characteristic

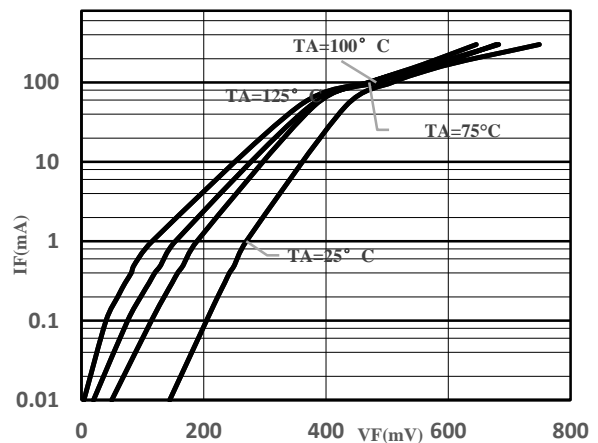


Fig 2 Typical Forward Characteristics

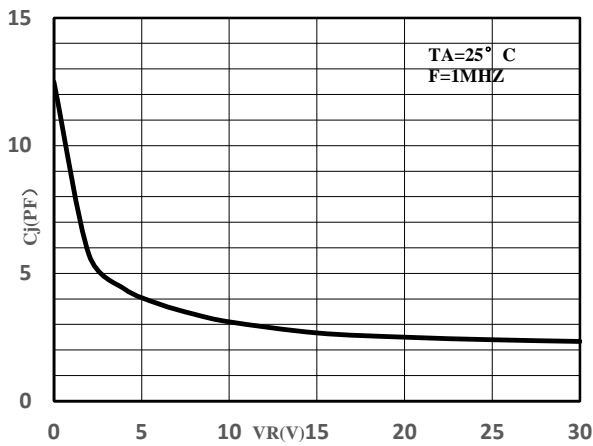


Fig 3 Capacitance Characteristics


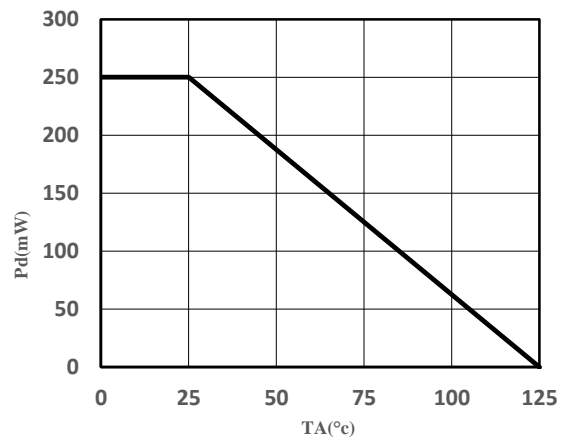


Fig 4 Derating Curve

Package Outline Dimensions (unit: mm)


SOT-23

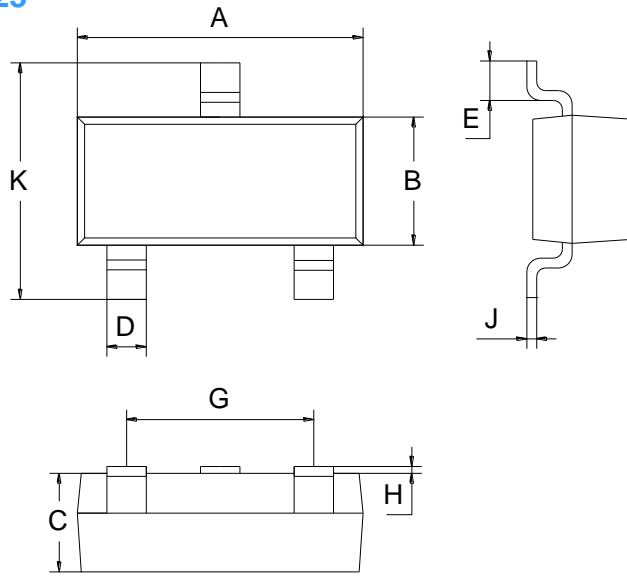

SOT-23		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	0.90	1.10
D	0.30	0.50
E	0.35	0.48
G	1.80	2.00
H	0.02	0.10
J	0.05	0.15
K	2.20	2.60

Mounting Pad Layout (unit: mm)

SOT-23

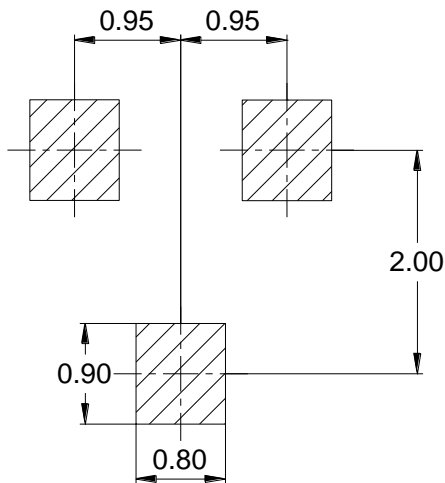

IMPORTANT NOTICE

Galaxy Microelectronics (GME) reserves the right to make changes without further notice to any product herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.