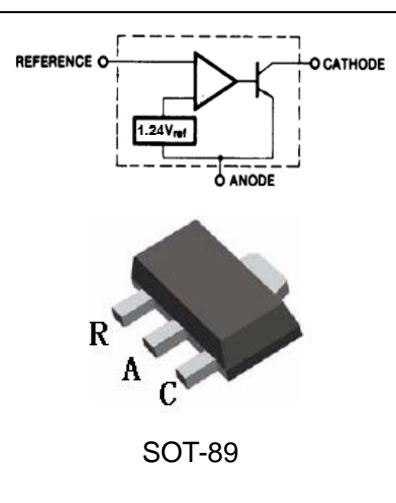


Programmable Shunt Regulator

BL432

FEATURES

- Low dynamic output impedance 0.20 typical
- Sink current capability of 1.0 to 100mA
- Equivalent full-range temperature coefficient of 50ppm/°C typical
- Temperature compensated for operation over full rated Operating temperature range
- Low output noise voltage
- Fast turn-on response


HF


ORDERING INFORMATION

Type No.	Marking	Package Code
BL432□	432	SOT-89

□: none is for Lead Free package;
 "G" is for Halogen Free package.

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Parameter	symbol	limits	unit
Cathode Voltage	V _{KA}	15	V
Cathode current Range(Continuous)	I _{KA}	100	mA
Reference Input Current Range	I _{REF}	-0.05 to +3	mA
Power dissipation	P _D	330	mW
Thermal Resistance Junction to Ambient	R _{θJA}	350	°C/W
Thermal Resistance, Junction to Case	R _{θJC}	155	°C/W
Operating Temperature Range	T _{OPR}	0 to 70	°C
Operating Junction Range	T _J	-40 to +150	°C
Storage temperature Range	T _{STG}	-65 to +150	°C

Programmable Shunt Regulator**BL432****Recommended Operating Conditions**

Parameter	symbol	Min	Typ	Max	Unit
Cathode Voltage	V_{KA}	V_{REF}	-	15	V
Cathode Current	I_{KA}	1.0	-	100	mA





ELECTRICAL CHARACTERISTICS @ $T_a=25^\circ C$ unless otherwise specified

Parameter	symbol	conditions	Min.	Typ.	Max.	unit
Refer Input Voltage	V_{REF}	$V_{KA}=V_{REF}, I_{KA}=10mA$ 0.5% 1% 2%	1.233 1.228 1.215	1.24	1.247 1.252 1.265	V
Deviation of Reference Input Voltage Over Full Temperature Range	$\Delta V_{REF}/\Delta T$	$V_{KA}=V_{REF}, I_{KA}=10mA$ TA=Full Range		10	25	mV
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage	$\Delta V_{REF}/\Delta V_{KA}$	$V_{KA}=1.25V\text{to}14.5V$		1.0	2.7	mV/V
Reverse Input current	I_{REF}	$R_1=10K\Omega, R_2=\infty$		0.5	1	μA
Deviation of Reference Input Current Over Full Temperature Range	$\Delta I_{REF}/\Delta T$	$R_1=10K\Omega, R_2=\infty$ TA=Full Range		0.05	0.3	μA
Minimun Cathode Current for Regulation	$I_{KA(MIN)}$	$V_{KA}= V_{REF}$		60	80	μA
Off-Stage Cathode Current	$I_{KA(OFF)}$	$V_{KA}=15V, V_{REF}=0$		0.04	0.5	μA
Dynamic Impedance(Note2)	Z_{ZA}	$V_{KA}= V_{REF}, IK=0.1 \text{ mA}\sim20 \text{ mA}$ $f\leq1.0\text{kHz}$		0.2	0.4	Ω

Programmable Shunt Regulator

BL432

TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

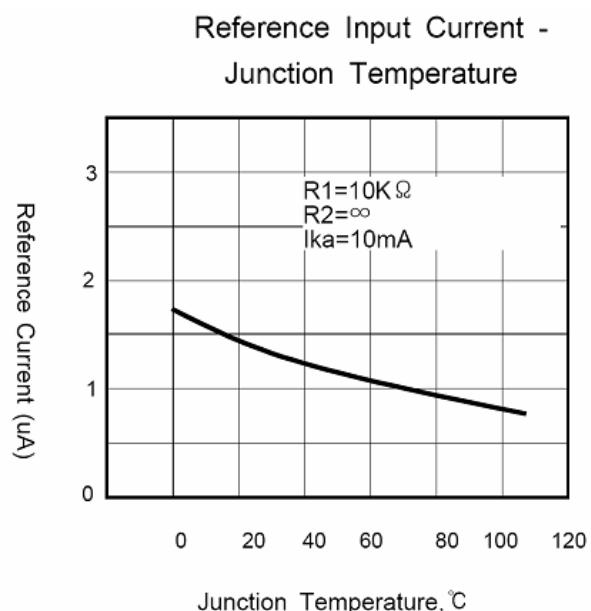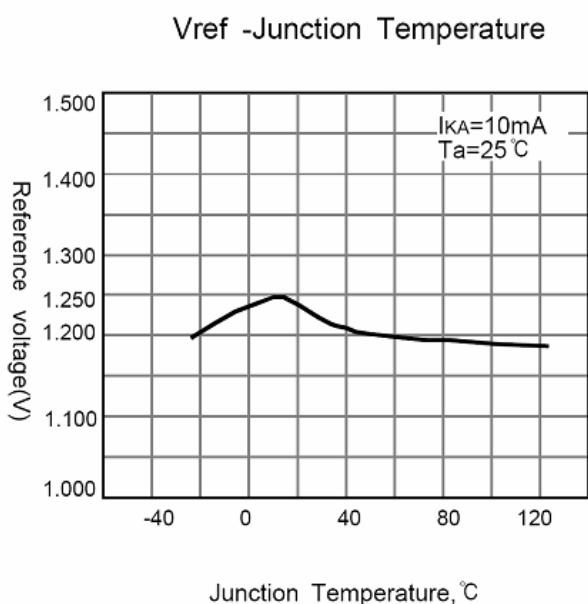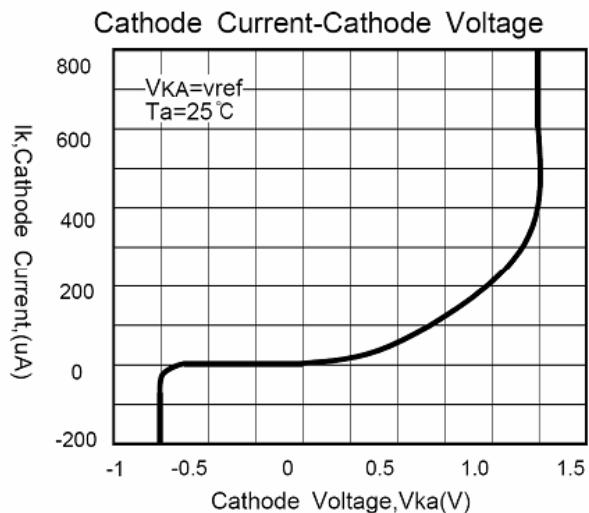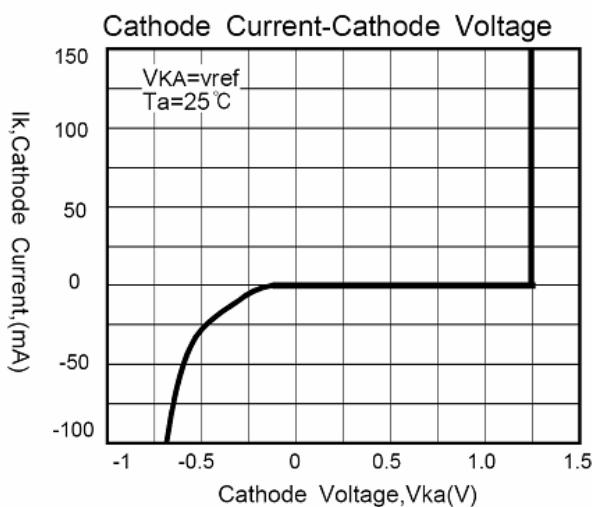


Programmable Shunt Regulator

BL432

PACKAGE OUTLINE

Plastic surface mounted package


SOT-89

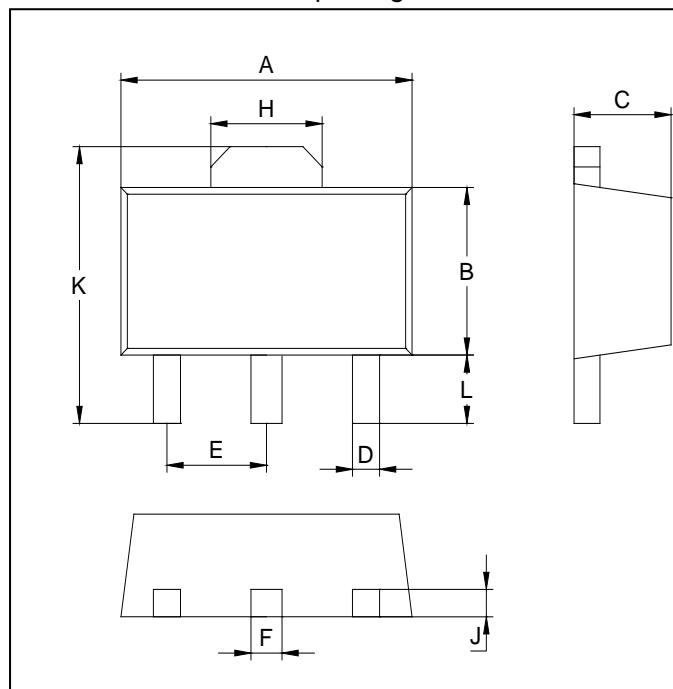

SOT-89		
Dim	Min	Max
A	4.30	4.70
B	2.25	2.65
C	1.30	1.70
D	0.30	0.50
E	1.40	1.60
F	0.38	0.58
H	1.60	1.80
J	0.30	0.50
L	0.90	1.10
K	3.95	4.35

All Dimensions in mm

SOLDERING FOOTPRINT

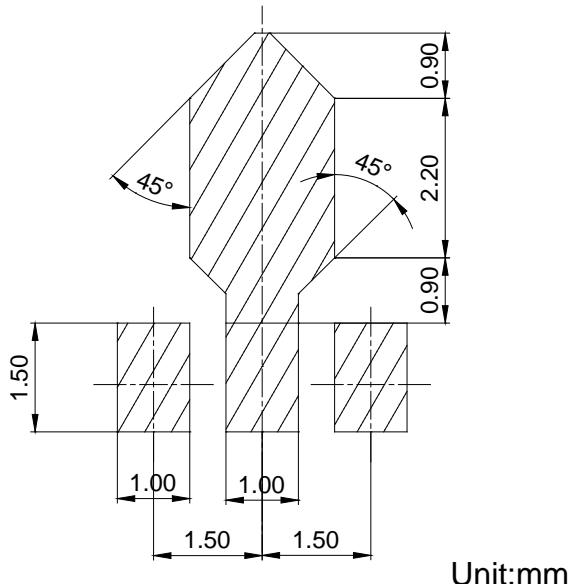

Unit:mm

PACKAGE INFORMATION

Device	Package	Shipping
BL432	SOT-89	1000/Tape&Reel