



Features

- Excellent h_{FE} linearity
- Complements the 2SC4081

HF

Mechanical Data

- Case: SOT -323
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Tin-plated; solderability per MIL-STD-202, Method 208

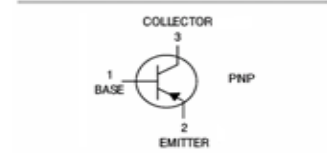

SOT-323

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
2SA1576A	SOT-323	3000 pcs / Tape & Reel	FQ/FR/FS

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	V_{CBO}	-60	V
Collector-Emitter Voltage	V_{CEO}	-50	V
Emitter-Base Voltage	V_{EBO}	-6	V
Collector Current (Continuous)	I_C	-150	mA
Collector Current (Peak)	I_{CM}	-200	mA

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation ($T_A = 25^\circ\text{C}$)	P_D	200	mW
Thermal Resistance Junction-to-Air ^{*1}	$R_{\theta JA}$	387	$^\circ\text{C}/\text{W}$
Thermal Resistance Junction-to-Case ^{*1}	$R_{\theta JC}$	199	$^\circ\text{C}/\text{W}$
Thermal Resistance Junction-to-Lead ^{*1}	$R_{\theta JL}$	264	$^\circ\text{C}/\text{W}$
Operating Junction Temperature	T_J	-55 ~ +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150	$^\circ\text{C}$

Note 1: The data tested by surface mounted on a 15mm * 15mm * 1mm FR4-epoxy P.C.B

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = -50\mu\text{A}, I_E = 0$	-60	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = -1\text{mA}, I_B = 0$	-50	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = -50\mu\text{A}, I_C = 0$	-6	-	-	V
Collector Cut-off Current	I_{CBO}	$V_{CB} = -60\text{V}, I_E = 0$	-	-	-100	nA
Emitter-base Cut-off Current	I_{EBO}	$V_{EB} = -6\text{V}, I_C = 0$	-	-	-100	nA
DC Current Gain	h_{FE}	$V_{CE} = -6\text{V}, I_C = -1\text{mA}$	120	-	560	-
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -50\text{mA}, I_B = -5\text{mA}$	-	-	-0.5	V
Transition Frequency	f_T	$V_{CE} = -12\text{V}, I_C = -2\text{mA}$ $f = 30\text{MHz}$	140	-	-	MHz
Collector Capacitance	C_C	$V_{CB} = -12\text{V}, I_E = I_C = 0$ $f = 1\text{MHz}$	-	-	5	pF

Classification of h_{FE}

Rank	Q	R	S
Range	120-270	180-390	270-560
Marking	FQ	FR	FS

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

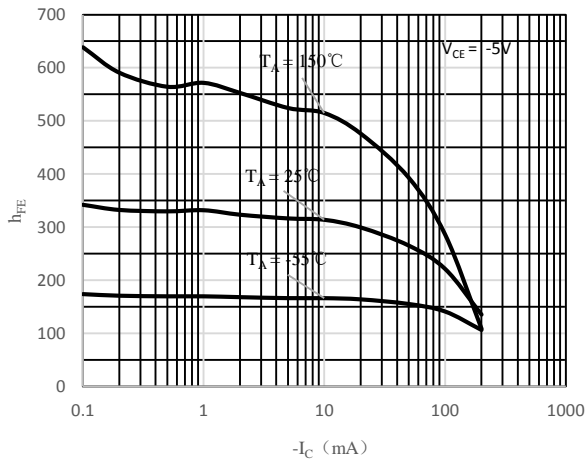


Fig 1 h_{FE} vs. I_C

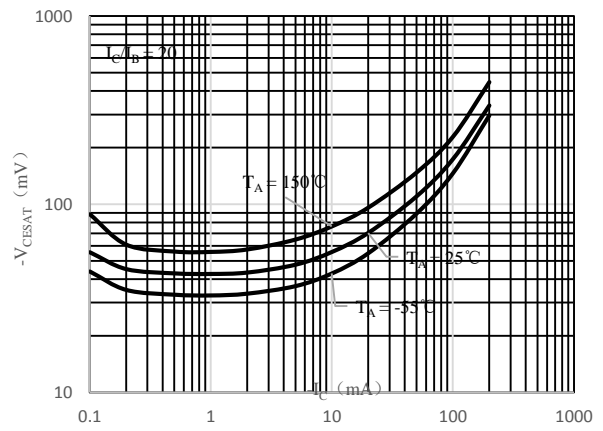


Fig 2 $V_{CE(sat)}$ vs. I_C

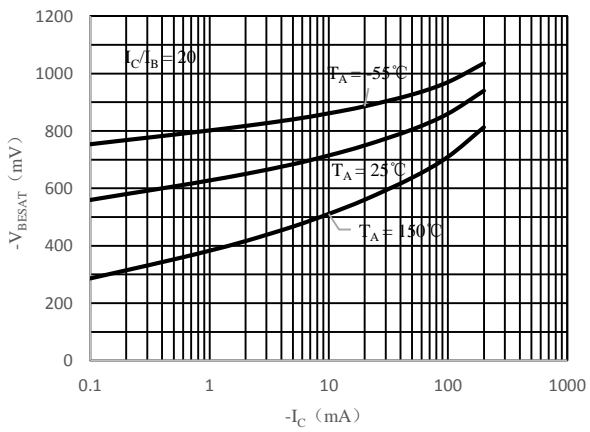


Fig 3 $V_{BE(sat)}$ vs. I_C



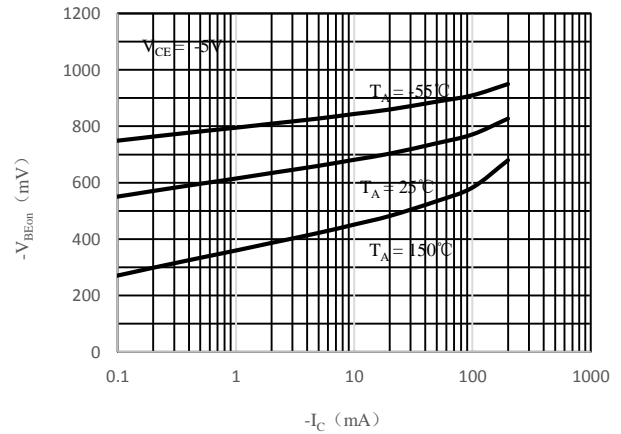


Fig 4 $V_{BE(on)}$ vs. I_C

Package Outline Dimensions (Unit: mm)

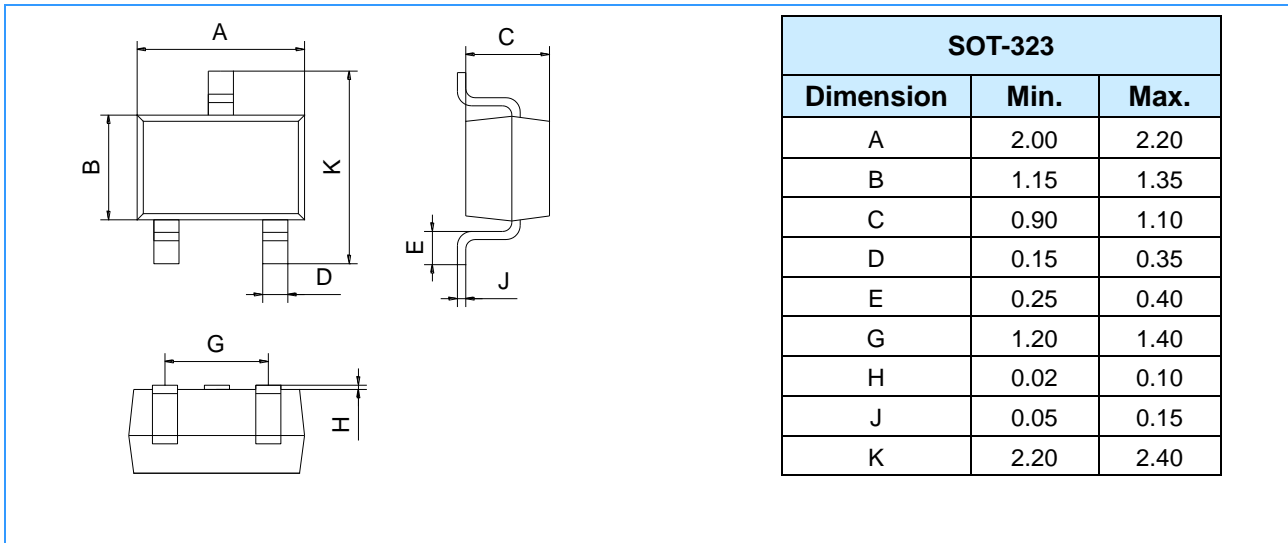

Mounting Pad Layout (Unit: mm)

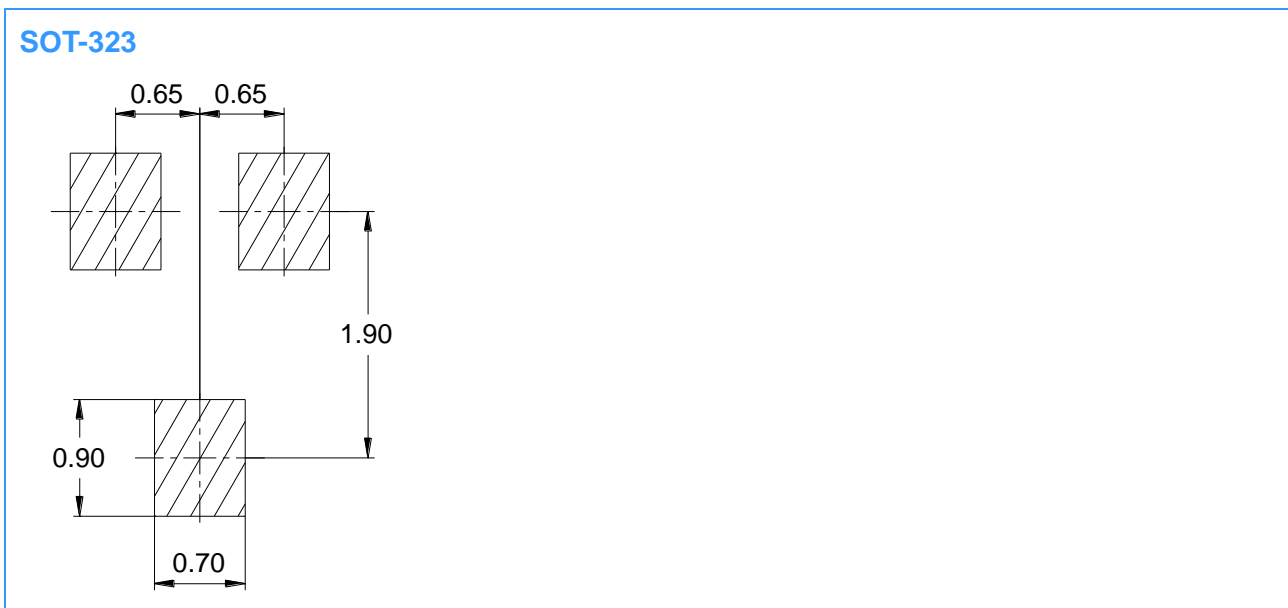

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.